





## Industrial Quality Air Compressors




**MODEL V7755-120**  
10 hp. gasoline,  
120 gallon vertical tank

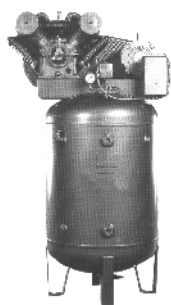

**MODEL V7735-80**  
5 hp. gasoline,  
80 gallon vertical tank

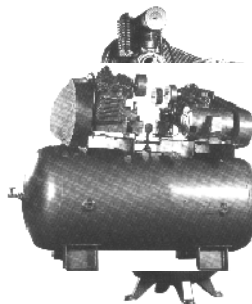


**MODEL X755-120**  
10 hp. duplex  
120 gallon tank




**MODEL BPL-45150**  
15 hp.  
Base mounted


HORSE POWER RANGE	SPASH LUBRICATED PUMP MODEL	PRESSURE LUBRICATED PUMP MODEL	100 PSI RATING			17 1/2 PSI RATING			BORE IN. DIA.	STROKE IN.	NO. CYL.	DIMENSIONS IN. LxWxH	SOLE DRAWN I X W IN.	APPROX. SHIPPING WT. LBS.
			CFM DISPL.	CFM DELVD.	HPM	CFM DISPL.	CFM DELVD.							
1 1/2-2	703	PI-203	540	18.5	8.3	570	18.8	7.5	3 1/2 x 3 1/2	3 1/2	7	19 1/2 x 11 1/2 x 20 1/2	7 1/2 x 8	207
3-5	706	PI-206	845	23.8	10.3	825	23.8	11.3	4 1/2 x 3 1/2	3 1/2	7	19 1/2 x 11 1/2 x 20 1/2	7 1/2 x 8	213
7 1/2-10	707	PI-207	845	46.8	30.6	845	46.8	34.4	4 1/2 x 3 1/2	2 1/2	4	21 1/2 x 20 1/2 x 17 1/2	8 1/2 x 8 1/2	511
10-15	4500	PI-4500	830	83.7	52.7	830	83.7	53.0	6 1/2 x 3 1/2	4 1/2	2	26 1/2 x 17 1/2 x 27	12 1/2 x 12 1/2	467
15-30	9000	PI-9000	830	177.4	104.5	830	177.4	101.1	6 1/2 x 3 1/2	4 1/2	4	26 1/2 x 17 1/2 x 27	12 1/2 x 12 1/2	678




**MODEL 705**



**MODEL PL-707**




**MODEL 4500**



**MODEL PL-9000**

## Rotary Screw Packages




Oil flooded rotary screw air end is designed for 100% duty cycle.

Radiator type air cooled oil after cooler removes heat from discharge air and compressor oil.

Spin on oil filter makes service easy.

Direct drive, C-face in sizes 15 to 50 horsepower.

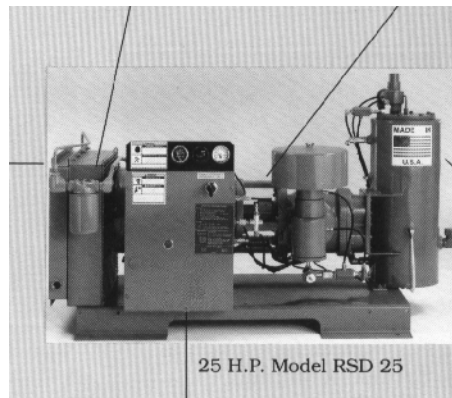

**25 H.P. Model RSD 25**

Oil separator tank with replacement element removes oil from compressed air and recycles into the compressor.

Compressor package controlled with fused transformer, three phase overload and external reset. Instrumentation includes air pressure gauge, hour meter and oil temperature gauge. High temperature and over pressure shutdown switches are also included.