

AUTOMATIC CHANGEOVER REGULATOR OUTFITS


Application

These outfits contain the equipment required to provide two-stage regulation.

Features:

- Includes a new pigtail. This helps ensure that a new pigtail is installed along with the regulator.

Kit Number	Automatic Changeover Regulator Model	Size	Outlet	Pigtails Included	Excluded Inlet	Capacity BTU's/hr. Pressure
321000	321000	1/2"	1/2"	2	1/2"	150,000
321000	321000	1/2"	1/2"	2	1/2"	150,000
321000	321000	1/2"	1/2"	2	1/2"	150,000
321000	321000	1/2"	1/2"	2	1/2"	150,000

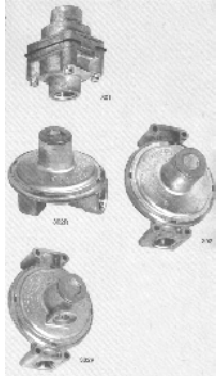

COMPACT REGULATORS

Application




These compact regulators are designed for smaller outdoor grills and fish cookers. It is intended for use on small portable appliances that use 100,000 BTU's/hr. or less. It may not be used on fixed pipe systems per NFPA 58, 1995 edition.

Features:

- All metal, die cast construction
- Molded diaphragm assure close control of burner pressure
- Durable valves leaders
- Variety of model configurations and sizes available
- All POL inlet connections are soft nose

Ordering Information

Part Number	Inlet Connections	Outlet Connections	Outlet Size	Factory Safety Release	Adjustment Range (PSI)	Outlet Position	Series Capacity (BTU's/hr. Pressure)
321000	1/2" NPT	1/2" NPT	1/2"	Yes	10-15	Top	150,000
321000	1/2" NPT	1/2" NPT	1/2"	Yes	10-15	Side	150,000
321000	1/2" NPT	1/2" NPT	1/2"	Yes	10-15	Bottom	150,000
321000	1/2" NPT	1/2" NPT	1/2"	Yes	10-15	Top	150,000
321000	1/2" NPT	1/2" NPT	1/2"	Yes	10-15	Side	150,000
321000	1/2" NPT	1/2" NPT	1/2"	Yes	10-15	Bottom	150,000

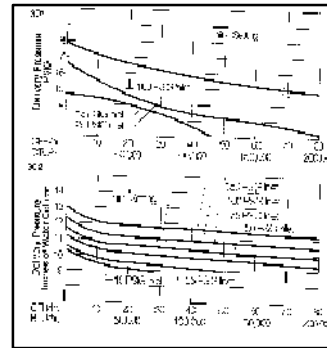

LOW PRESSURE SINGLE STAGE REGULATORS

Application

A compact, sturdy regulator incorporating many of the quality features found in larger domestic regulators. Ideal for outdoor LP-Gas grills. The regulator reduces cylinder pressure down to burner pressure, normally 11" w.c. It is intended for use on small portable appliances that use 100,000 BTU's/hr. or less. It may not be used on fixed pipe systems per NFPA 58, 1995 edition.


Features:

- Compact size with large capacity rating
- Equipped with integral relief valve
- Unique bonnet vent profile minimizes vent freeze over when properly installed.
- Built in pressure tap has plugged 1/8" F.NPT outlet.
- Large diaphragm provides better regulation and lower lock-up
- Classic gold finish

Ordering Information

Part Number	Inlet	Outlet	Outlet Conn.	Outlet Pressure	Adjustment Range	Bonnet Vent Position	Series Capacity (BTU's/hr. Pressure)
321000	1/2" NPT	1/2" NPT	1/2"	11" w.c.	10-15	Top	150,000
321000	1/2" NPT	1/2" NPT	1/2"	11" w.c.	10-15	Side	150,000
321000	1/2" NPT	1/2" NPT	1/2"	11" w.c.	10-15	Bottom	150,000


Material	Body	Diaphragm	Seals	Valve Stem O-Ring	Pressure Tap Plug
321000	Aluminum	NBR	NBR	NBR	Aluminum
321000	Aluminum	NBR	NBR	NBR	Aluminum
321000	Aluminum	NBR	NBR	NBR	Aluminum

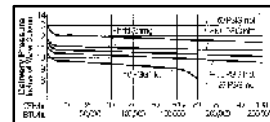

COMPACT SINGLE STAGE REGULATORS

Application

This outfit contains all the necessary parts to manifold the model 302V regulator between two cylinders. It is intended for use on small portable appliances that use 100,000 BTU's/hr. or less. It may not be used on fixed pipe systems per NFPA 58, 1995 edition.

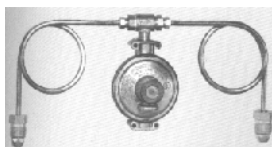

Outfit Number	Regulator Model	Outlet Size	Outlet Position	Series Capacity (BTU's/hr. Pressure)
302V	302V	1/2"	Top	150,000
302V	302V	1/2"	Side	150,000
302V	302V	1/2"	Bottom	150,000

